



### Product description

- The mic-sensor with one switched output measures the distance to an object within the detection zone contactless. Depending on the adjusted detect distance the switched output is set.
- The output functions are changeable from NOC to NCC.
- The sensors are adjustable using Teach-in processes via the Com-channel (Pin 5).
- Using the LinkControl adapter (optional accessory) all Teach-in and additional sensor parameter settings may be made by a Windows-Software.

## Instruction manual

### mic Ultrasonic Sensors with one switched output

mic-25/D/M  
mic-35/D/M  
mic-130/D/M  
mic-340/D/M  
mic-600/D/M

### Important instructions for assembly and application

All employee and plant safety-relevant measures must be taken prior to assembly, start-up, or maintenance work (see operation manual for the entire plant and the operator instruction of the plant).

The sensors are **not** considered as safety equipment and may not be used to ensure human or machine safety!

The mic-sensors indicate a **blind zone**, in which the distance cannot be measured. The **operating range** indicates the distance of the sensor that can be applied with normal reflectors with sufficient function reserve. When using good reflectors, such as a calm water surface, the sensor can also be used up to its **maximum range**. Objects that strongly absorb (e.g. plastic foam) or diffusely reflect sound (e.g. pebble stones) can also reduce the defined operating range.

### Assembly instructions

- ☞ Assemble the sensor at the installation location.
- ☞ Plug in the connector cable to the M 12 connector.

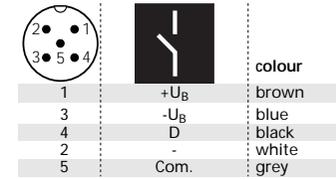


Abb. 1: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

### Assembly distances

The table below lists the minimum mounting distances between two sensors. Smaller distances should not be used because otherwise the sensors can influence each other.

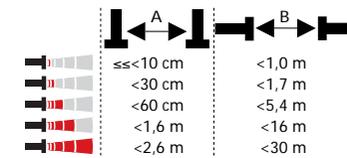


Abb. 2: Minimum assembly distances

### Start-up

mic-sensors are delivered factory made with the following settings:

- Switched output on NOC
- Detecting distance at operating range and half operating range
- Maximum detection range set to maximum range

Set the parameters of the sensor using the Teach-in procedure to adjust the detect points.

### Operation


mic-sensors work maintenance free. Small amounts of dirt on the surface do not influ-

ence function. Thick layers of dirt and caked-on dirt affect sensor function and therefore must be removed.







### Note

- mic-sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approx. 30 minutes of operation.
- During Teach-in mode, the hysteresis loops are set back to factory settings.
- If no signal is detected for 20 seconds during teach-in procedure the made changes are stored and the sensor returns to normal mode operation.
- You can reset the factory settings at any time, see »Reset to factory setting«.

## Set the mic-sensor using the Teach-in procedure

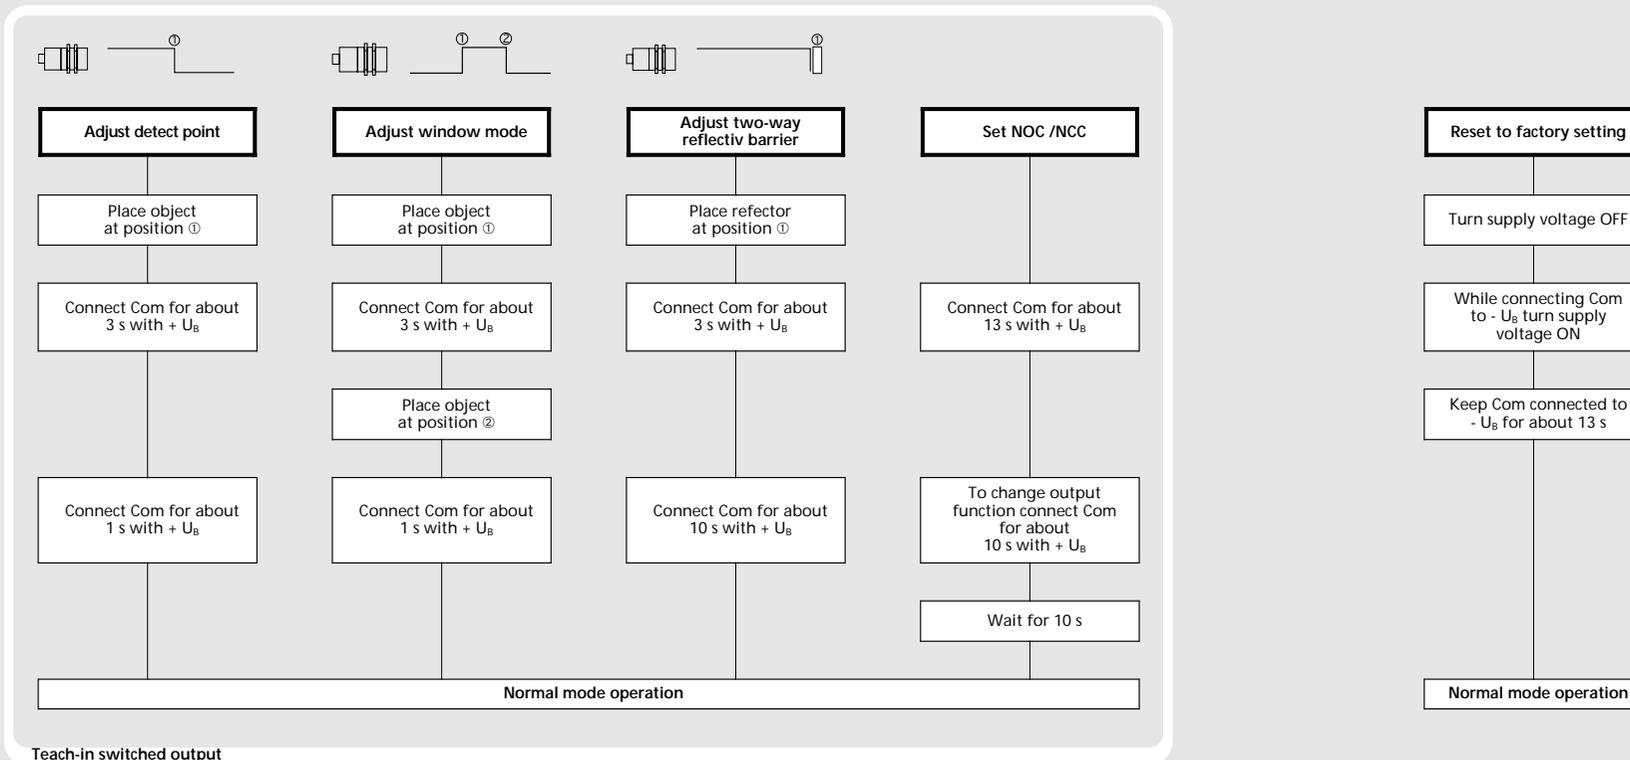

# Technical data

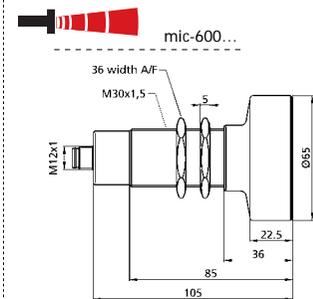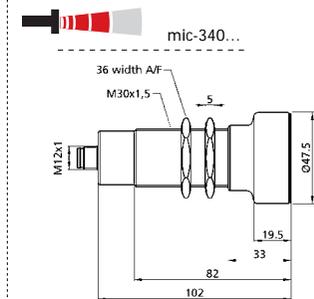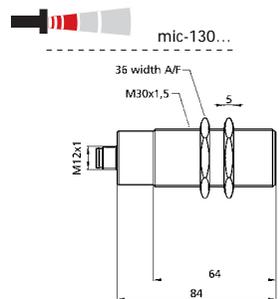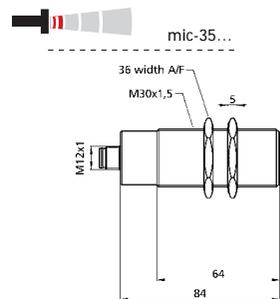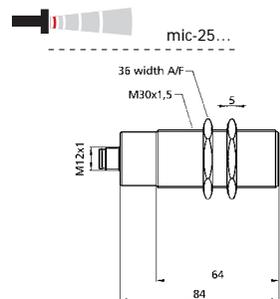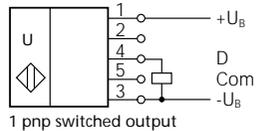

**Blind zone** 0 to 30 mm  
**Operating range** 250 mm  
**Maximum range** 350 mm  
**Angle of beam spread** Please see detection zone  
**Transducer frequency** 320 kHz  
**Resolution, sampling rate** 0,18 mm  
**Reproducibility** ± 0,15 %  
**Accuracy** Temperature drift internal compensated, ≤ 2 % may be deactivated<sup>1)</sup> (0,17%/K without compensation)






**Blind zone** 0 to 60 mm  
**Operating range** 350 mm  
**Maximum range** 600 mm  
**Angle of beam spread** Please see detection zone  
**Transducer frequency** 400 kHz  
**Resolution, sampling rate** 0,18 mm  
**Reproducibility** ± 0,15 %  
**Accuracy** Temperature drift internal compensated, ≤ 2 % may be deactivated<sup>1)</sup> (0,17%/K without compensation)

**Blind zone** 0 to 200 mm  
**Operating range** 1.300 mm  
**Maximum range** 2.000 mm  
**Angle of beam spread** Please see detection zone  
**Transducer frequency** 200 kHz  
**Resolution, sampling rate** 0,18 mm  
**Reproducibility** ± 0,15 %  
**Accuracy** Temperature drift internal compensated, ≤ 2 % may be deactivated<sup>1)</sup> (0,17%/K without compensation)

**Blind zone** 0 to 350 mm  
**Operating range** 3.400 mm  
**Maximum range** 5.000 mm  
**Angle of beam spread** Please see detection zone  
**Transducer frequency** 120 kHz  
**Resolution, sampling rate** 0,18 mm  
**Reproducibility** ± 0,15 %  
**Accuracy** Temperature drift internal compensated, ≤ 2 % may be deactivated<sup>1)</sup> (0,17%/K without compensation)

**Blind zone** 0 to 800 mm  
**Operating range** 6.000 mm  
**Maximum range** 8.000 mm  
**Angle of beam spread** Please see detection zone  
**Transducer frequency** 80 kHz  
**Resolution, sampling rate** 0,18 mm  
**Reproducibility** ± 0,15 %  
**Accuracy** Temperature drift internal compensated, ≤ 2 % may be deactivated<sup>1)</sup> (0,17%/K without compensation)

**Detection zones** for different objects:  
 The dark grey areas are determined with a thin round bar (10 or 27 mm dia.) and indicate the typical operating range of a sensor. In order to obtain the light grey areas, a plate (500 x 500 mm) is introduced into the beam spread from the side. In doing so, the optimum angle between plate and sensor is always employed. This therefore indicates the maximum detection zone of the sensor. It is not possible to evaluate ultrasonic reflections outside this area.

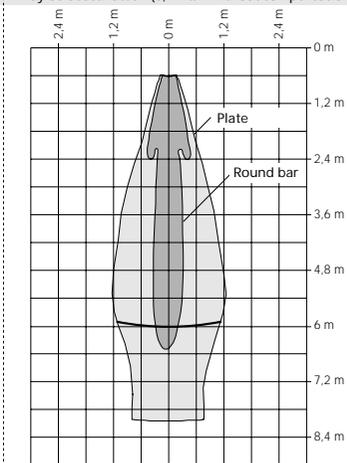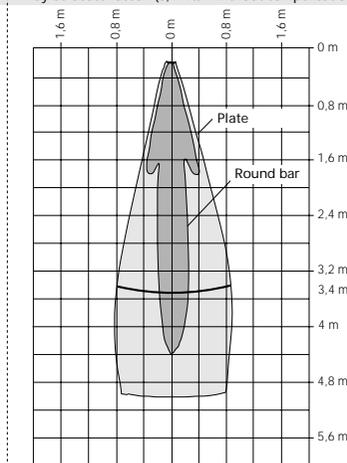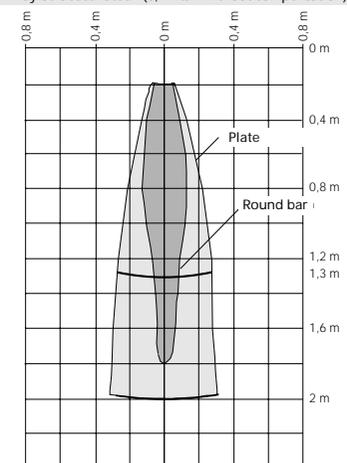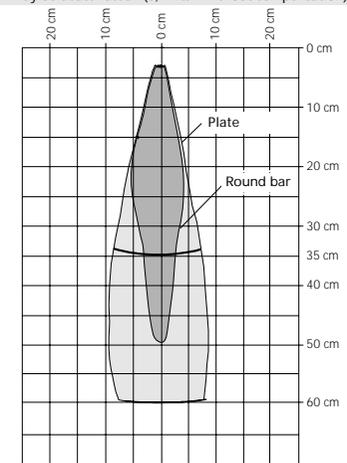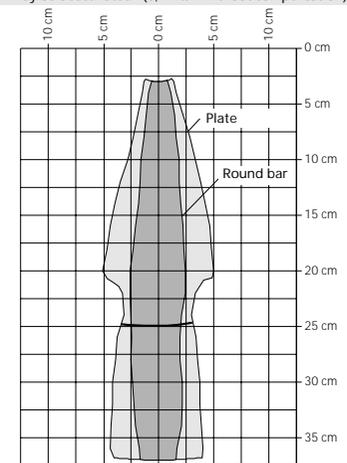

**Operating voltage U<sub>B</sub>** 9 V to 30 V DC, reverse polarity protection  
**Voltage ripple** ±10 %  
**No-load supply current** ≤ 80 mA  
**Housing** Brass sleeve, nickel-plated, plastic parts: PBT; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**Class of protection to EN 60529** IP 67  
**Norm conformity** EN 60947-5-2  
**Type of connection** 5-pin initiator plug, Brass, nickel-plated  
**Controls** Yes, via Com-channel  
**Indicators** No  
**Programmable** Yes, with Teach-in and LinkControl  
**Operating temperature** -20°C bis +70°C  
**Storage temperature** -40°C bis +85°C  
**Weight** 200 g  
**Switching hysteresis<sup>1)</sup>** 3 mm  
**switching frequency<sup>1)</sup>** 11 Hz  
**Response time<sup>1)</sup>** 50 ms  
**Time delay before availability** < 300 ms

**Operating voltage U<sub>B</sub>** 9 V to 30 V DC, reverse polarity protection  
**Voltage ripple** ±10 %  
**No-load supply current** ≤ 80 mA  
**Housing** Brass sleeve, nickel-plated, plastic parts: PBT; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**Class of protection to EN 60529** IP 67  
**Norm conformity** EN 60947-5-2  
**Type of connection** 5-pin initiator plug, Brass, nickel-plated  
**Controls** Yes, via Com-channel  
**Indicators** No  
**Programmable** Yes, with Teach-in and LinkControl  
**Operating temperature** -25°C bis +70°C  
**Storage temperature** -40°C bis +85°C  
**Weight** 200 g  
**Switching hysteresis<sup>1)</sup>** 5 mm  
**switching frequency<sup>1)</sup>** 8 Hz  
**Response time<sup>1)</sup>** 70 ms  
**Time delay before availability** < 300 ms

**Operating voltage U<sub>B</sub>** 9 V to 30 V DC, reverse polarity protection  
**Voltage ripple** ±10 %  
**No-load supply current** ≤ 80 mA  
**Housing** Brass sleeve, nickel-plated, plastic parts: PBT; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**Class of protection to EN 60529** IP 67  
**Norm conformity** EN 60947-5-2  
**Type of connection** 5-pin initiator plug, Brass, nickel-plated  
**Controls** Yes, via Com-channel  
**Indicators** No  
**Programmable** Yes, with Teach-in and LinkControl  
**Operating temperature** -25°C bis +70°C  
**Storage temperature** -40°C bis +85°C  
**Weight** 200 g  
**Switching hysteresis<sup>1)</sup>** 20 mm  
**switching frequency<sup>1)</sup>** 6 Hz  
**Response time<sup>1)</sup>** 110 ms  
**Time delay before availability** < 300 ms

**Operating voltage U<sub>B</sub>** 9 V to 30 V DC, reverse polarity protection  
**Voltage ripple** ±10 %  
**No-load supply current** ≤ 80 mA  
**Housing** Brass sleeve, nickel-plated, plastic parts: PBT; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**Class of protection to EN 60529** IP 67  
**Norm conformity** EN 60947-5-2  
**Type of connection** 5-pin initiator plug, Brass, nickel-plated  
**Controls** Yes, via Com-channel  
**Indicators** No  
**Programmable** Yes, with Teach-in and LinkControl  
**Operating temperature** -25°C bis +70°C  
**Storage temperature** -40°C bis +85°C  
**Weight** 260 g  
**Switching hysteresis<sup>1)</sup>** 50 mm  
**switching frequency<sup>1)</sup>** 3 Hz  
**Response time<sup>1)</sup>** 180 ms  
**Time delay before availability** < 300 ms

**Operating voltage U<sub>B</sub>** 9 V to 30 V DC, reverse polarity protection  
**Voltage ripple** ±10 %  
**No-load supply current** ≤ 80 mA  
**Housing** Brass sleeve, nickel-plated, plastic parts: PBT; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content  
**Class of protection to EN 60529** IP 67  
**Norm conformity** EN 60947-5-2  
**Type of connection** 5-pin initiator plug, Brass, nickel-plated  
**Controls** Yes, via Com-channel  
**Indicators** No  
**Programmable** Yes, with Teach-in and LinkControl  
**Operating temperature** -25°C bis +70°C  
**Storage temperature** -40°C bis +85°C  
**Weight** 320 g  
**Switching hysteresis<sup>1)</sup>** 100 mm  
**switching frequency<sup>1)</sup>** 2 Hz  
**Response time<sup>1)</sup>** 240 ms  
**Time delay before availability** < 300 ms

**Order No.** mic-25/D/M  
**Switched output** pnp, U<sub>B</sub> - 2 V, I<sub>max</sub> = 200 mA switchable NOC/NCC, short-circuit-proof

**Order No.** mic-35/D/M  
**Switched output** pnp, U<sub>B</sub> - 2 V, I<sub>max</sub> = 200 mA switchable NOC/NCC, short-circuit-proof

**Order No.** mic-130/D/M  
**Switched output** pnp, U<sub>B</sub> - 2 V, I<sub>max</sub> = 200 mA switchable NOC/NCC, short-circuit-proof

**Order No.** mic-340/D/M  
**Switched output** pnp, U<sub>B</sub> - 2 V, I<sub>max</sub> = 200 mA switchable NOC/NCC, short-circuit-proof

**Order No.** mic-600/D/M  
**Switched output** pnp, U<sub>B</sub> - 2 V, I<sub>max</sub> = 200 mA switchable NOC/NCC, short-circuit-proof

1) Can be programmed with LinkControl

